



SGM8478-1C

High Voltage, High Precision, Low Noise, Over the Rail Difference Amplifier

GENERAL DESCRIPTION

SGM8478-1C is a low noise, high precision difference amplifier with low input offset voltage. Its input common mode voltage range covers up to $(+V_S) + 1V$. And this device is guaranteed to operate from 4.5V to 36V.

SGM8478-1C's wide input voltage range makes this device suitable for current sensing applications. Meanwhile, SGM8478-1C features high linearity and high accuracy. The combination of these characteristics makes the SGM8478-1C a good choice for temperature, position and pressure sensors, medical equipment and strain gauge amplifiers, or any other 4.5V to 36V applications requiring precision and long term stability.

Integrated matched resistors for differential applications save external components. The gain of SGM8478-1C is 50V/V.

The SGM8478-1C is available in Green SOIC-8 and TDFN-3x3-8L packages. It operates over an ambient temperature range of -40°C to +125°C.

FEATURES

- **Low Offset Voltage: 16 μ V (MAX)**
- **4.5V to 36V Single Supply Operation**
- **Input Signal Range:**
 $(-V_S) - 0.1V$ to $(+V_S) + 1V$ for Dual Power Supplies
GND - 0.1V to $(+V_S) + 1V$ for Single Power Supply
- **Rail-to-Rail Output**
- **Gain: 50V/V**
- **PSRR: 0.05 μ V/V (TYP)**
- **CMRR: 106dB (TYP)**
- **0.1Hz to 10Hz Noise: 0.75 μ V_{P-P}**
- **Input Voltage Noise Density: 39nV/ $\sqrt{\text{Hz}}$ at 1kHz**
- **-3dB Bandwidth: 230kHz**
- **Integrated Matched Resistors for Differential Applications**
- **Supply Current: 1.55mA (TYP)**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green SOIC-8 and TDFN-3x3-8L Packages**

APPLICATIONS

Temperature Measurements
Pressure Sensors
Precision Current Sensing
Electronic Scales
Strain Gauge Amplifiers
Medical Instrumentation
Thermocouple Amplifiers
Handheld Test Equipment

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8478-1C (Gain = 50)	SOIC-8	-40°C to +125°C	SGM8478-1CXS8G/TR	SGM 84781CXS8 XXXXX	Tape and Reel, 2500
	TDFN-3x3-8L	-40°C to +125°C	SGM8478-1CXTDB8G/TR	SGM 84781DB XXXXX	Tape and Reel, 4000

MARKING INFORMATION

NOTE: XXXXX = Date Code and Vendor Code.

XXXXX

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage.....	40V
Input Voltage Range	(-V _S) -0.3V to (+V _S) + 1V
Junction Temperature	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM.....	5000V
CDM	1000V

RECOMMENDED OPERATING CONDITIONS

Operating Voltage Range.....	4.5V to 36V
Operating Temperature Range	-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

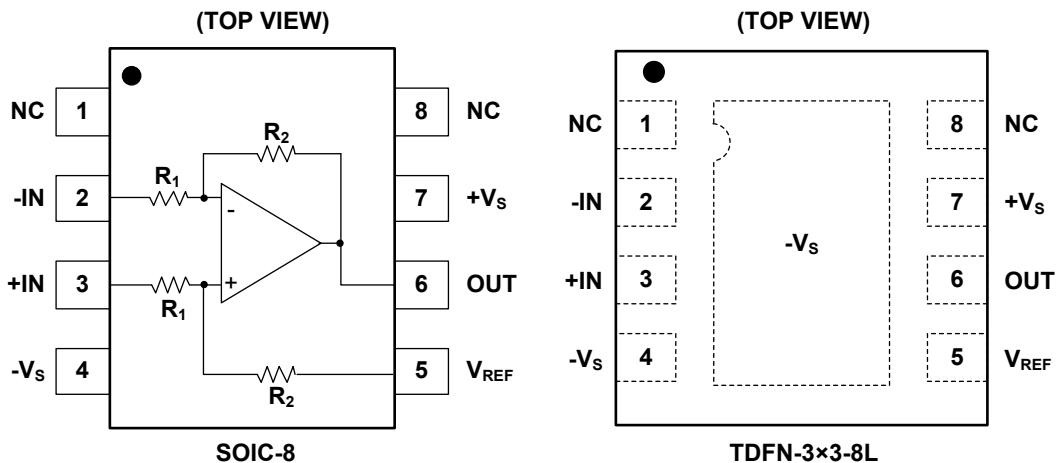
ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


PIN CONFIGURATIONS



PIN DESCRIPTION

PIN		NAME	FUNCTION
SOIC-8	TDFN-3x3-8L		
1, 8	1, 8	NC	No Connection.
2	2	-IN	Inverting Input.
3	3	+IN	Non-Inverting Input.
4	4	-V _S	Negative Power Supply.
5	5	V _{REF}	Reference Voltage Terminal.
6	6	OUT	Output of Amplifier.
7	7	+V _S	Positive Power Supply.
-	Exposed Pad	-V _S	Exposed pad should be soldered to PCB board and connected to -V _S .

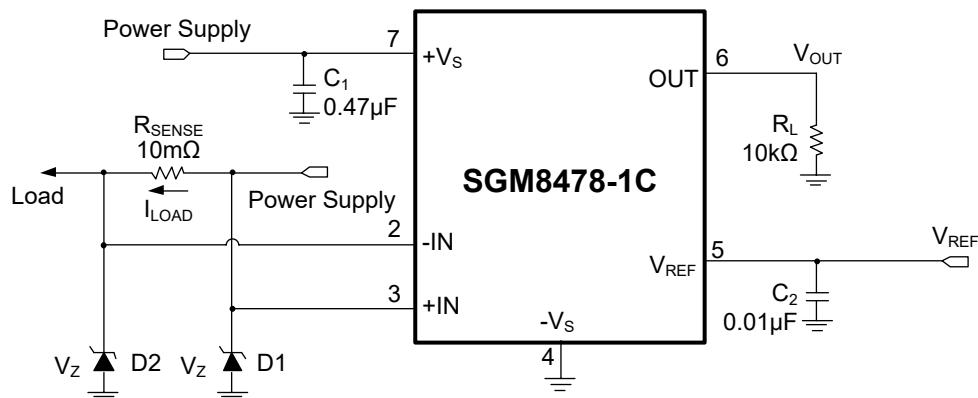APPLICATION CIRCUIT









$$V_{OUT} - V_{REF} = \text{Gain} \times I_{LOAD} \times R_{SENSE}$$

ELECTRICAL CHARACTERISTICS(At $T_A = +25^\circ\text{C}$, $+V_S = 4.5\text{V}$ to 36V , $-V_S = 0\text{V}$, $V_{CM} = V_{REF} = +V_S/2$ and $R_L = 10\text{k}\Omega$, Full = -40°C to $+125^\circ\text{C}$, unless otherwise noted.)







PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics						
Input Offset Voltage (V_{OS})	$V_S = 4.5\text{V}$ to 36V	+25°C		5	16	μV
		Full			40	
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$)		Full		0.14		$\mu\text{V}/^\circ\text{C}$
Input Common Mode Voltage Range (V_{CM})		Full	($-V_S$) - 0.1		($+V_S$) + 1	V
Common Mode Rejection Ratio (CMRR) ⁽¹⁾	($-V_S$) - 0.1V < V_{CM} < ($+V_S$) + 1V	+25°C	92	106		dB
		Full	89			
Output Characteristics						
Output Voltage Swing from Rail	$V_S = 36\text{V}$, $R_L = 10\text{k}\Omega$	+25°C		195	270	mV
		Full			320	
Output Short-Circuit Current (I_{SC})	$V_S = 4.5\text{V}$	Full	9	19		mA
	$V_S = 36\text{V}$		37	64		
Power Supply						
Specified Voltage Range (V_S)		Full	4.5		36	V
Power Supply Rejection Ratio (PSRR) ⁽¹⁾	$V_S = 4.5\text{V}$ to 36V	+25°C		0.05	0.3	$\mu\text{V}/\text{V}$
		Full			0.45	
Quiescent Current (I_Q)	$V_S = 4.5\text{V}$ to 36V	+25°C		1.55	2.1	mA
		Full			2.4	
Dynamic Performance						
-3dB Bandwidth	$C_L = 25\text{pF}$	+25°C		230		kHz
Slew Rate (SR)	$V_S = 30\text{V}$, $V_{OUT} = 4\text{V}_{P-P}$	+25°C		2.1		$\text{V}/\mu\text{s}$
Noise						
Input Voltage Noise ⁽¹⁾	$f = 0.1\text{Hz}$ to 10Hz	+25°C		0.75		μV_{P-P}
Input Voltage Noise Density (e_n) ⁽¹⁾	$f = 1\text{kHz}$	+25°C		39		$\text{nV}/\sqrt{\text{Hz}}$
Gain						
Gain Error	$V_S = 30\text{V}$, $-9\text{V} \leq V_{OUT} \leq 9\text{V}$	+25°C		0.01	0.1	%
Gain Temperature Coefficient	$V_S = 30\text{V}$, $-9\text{V} \leq V_{OUT} \leq 9\text{V}$	+25°C		0.15		$\text{ppm}/^\circ\text{C}$

NOTE: 1. Referred to input.

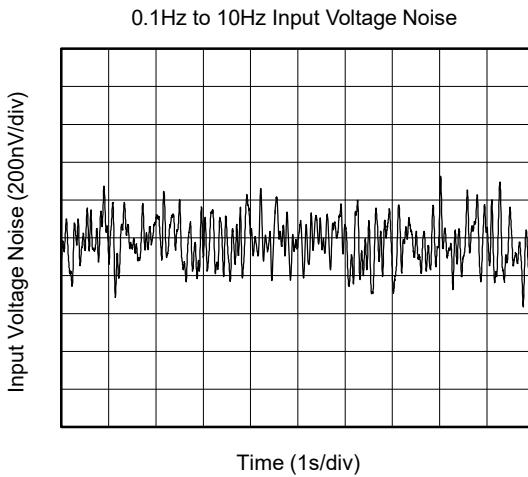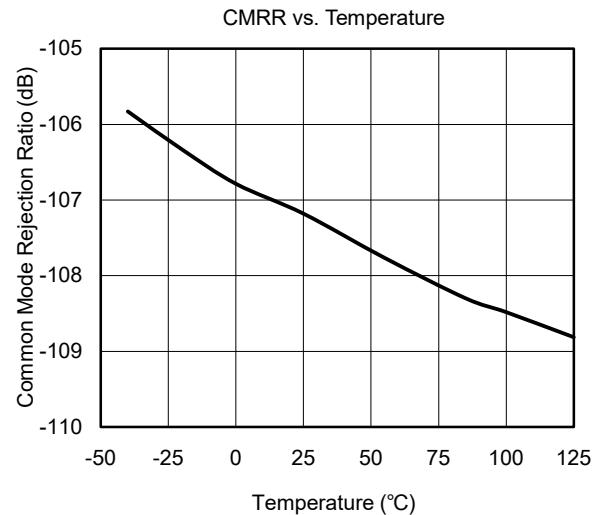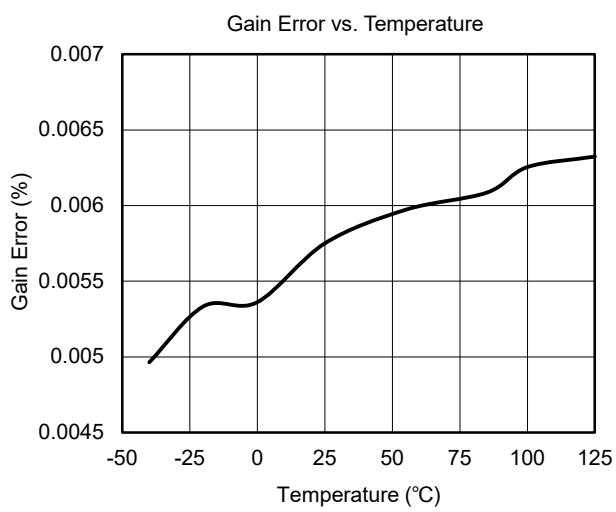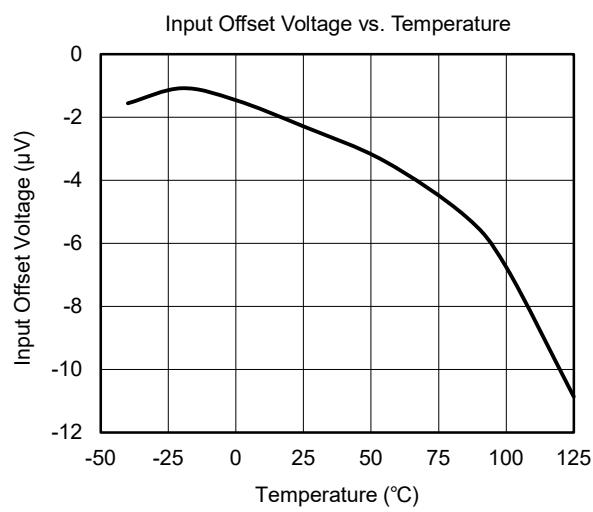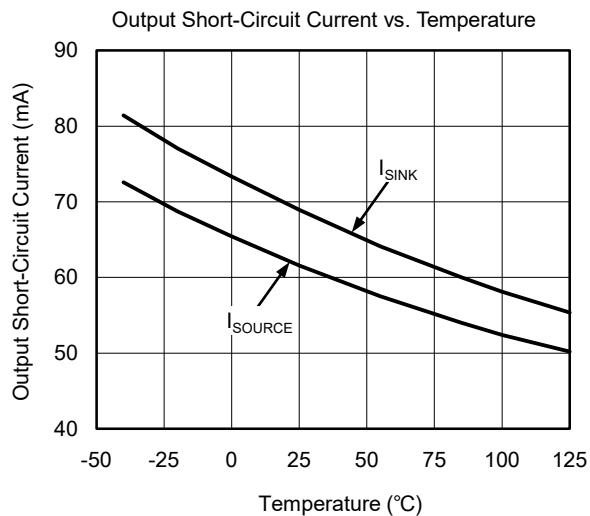
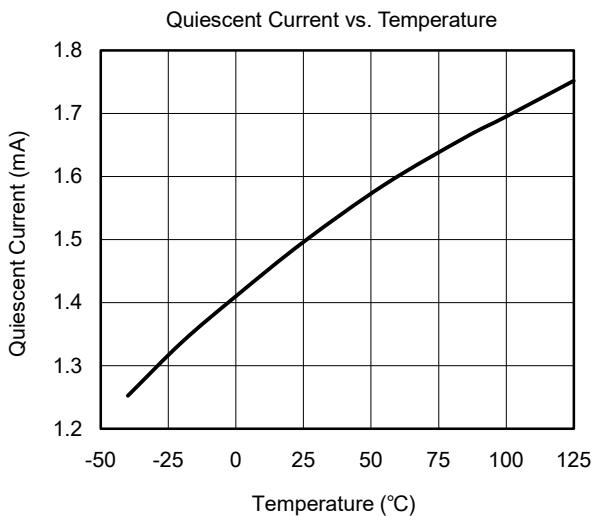
TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = 30\text{V}$, unless otherwise noted.

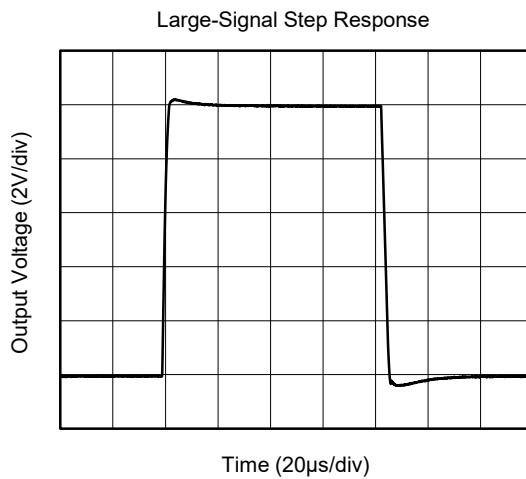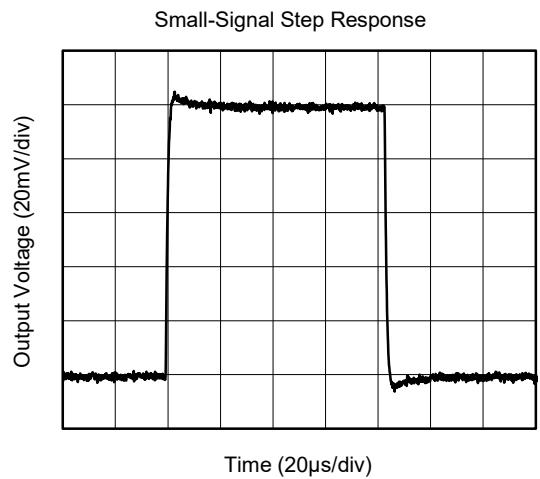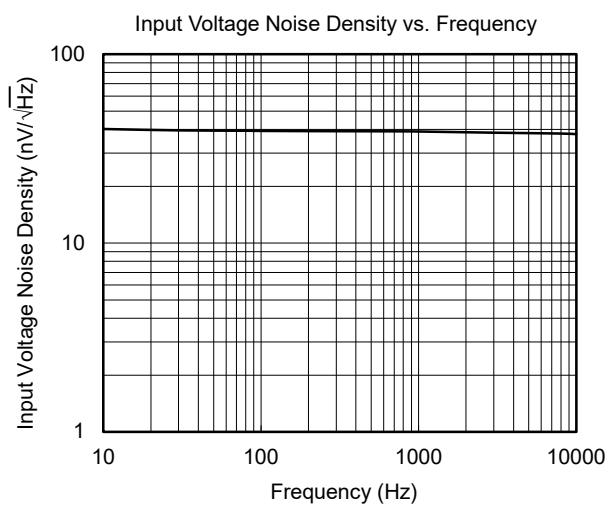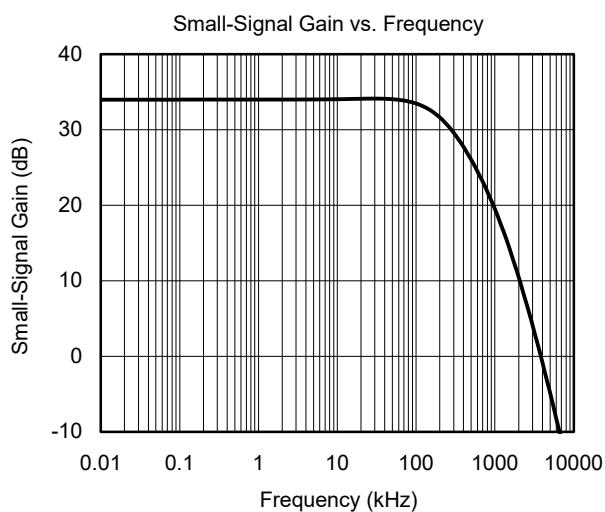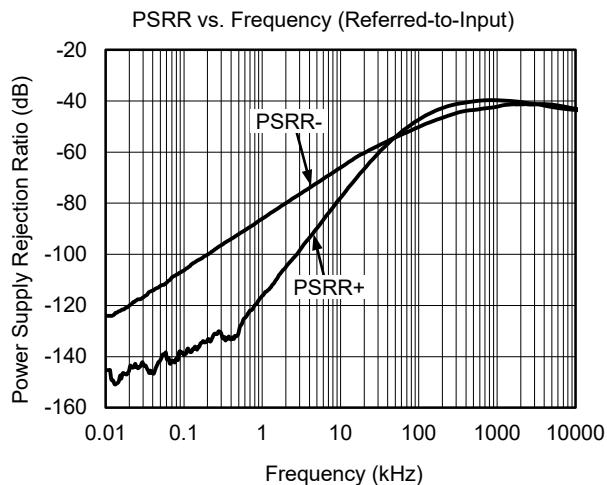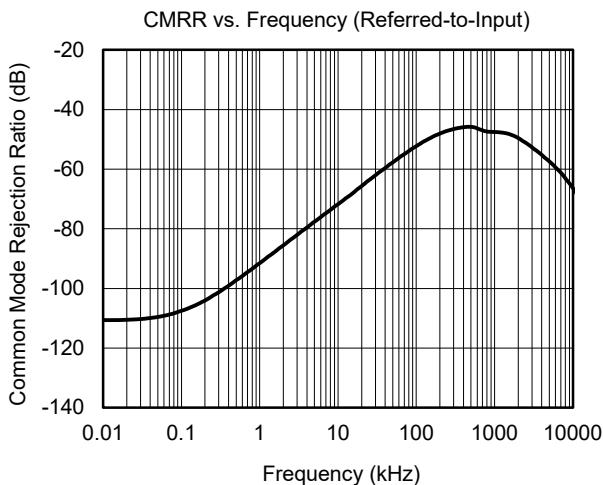TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 30\text{V}$, unless otherwise noted.

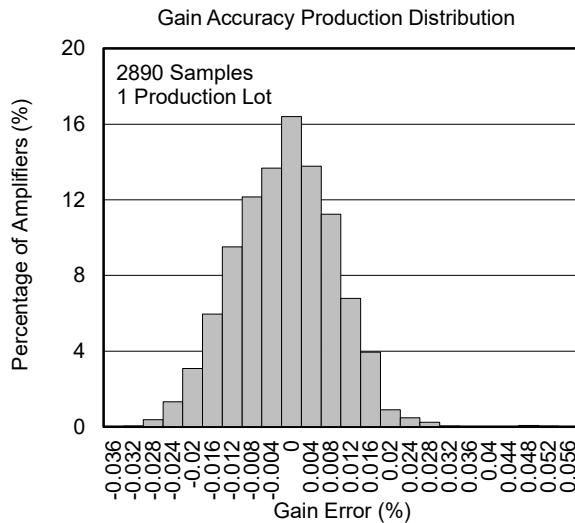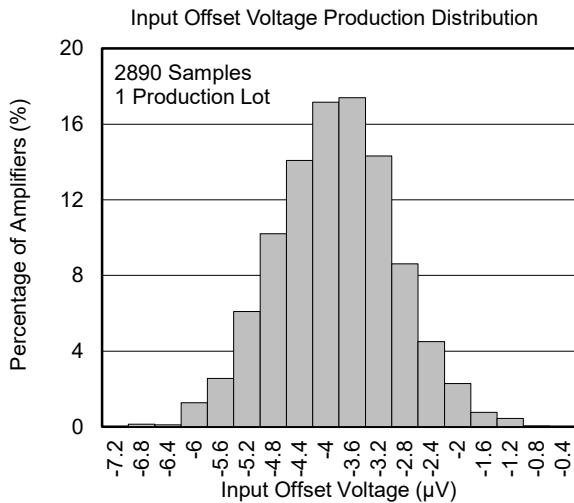TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 30\text{V}$, unless otherwise noted.

REVISION HISTORY


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (JUNE 2019) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

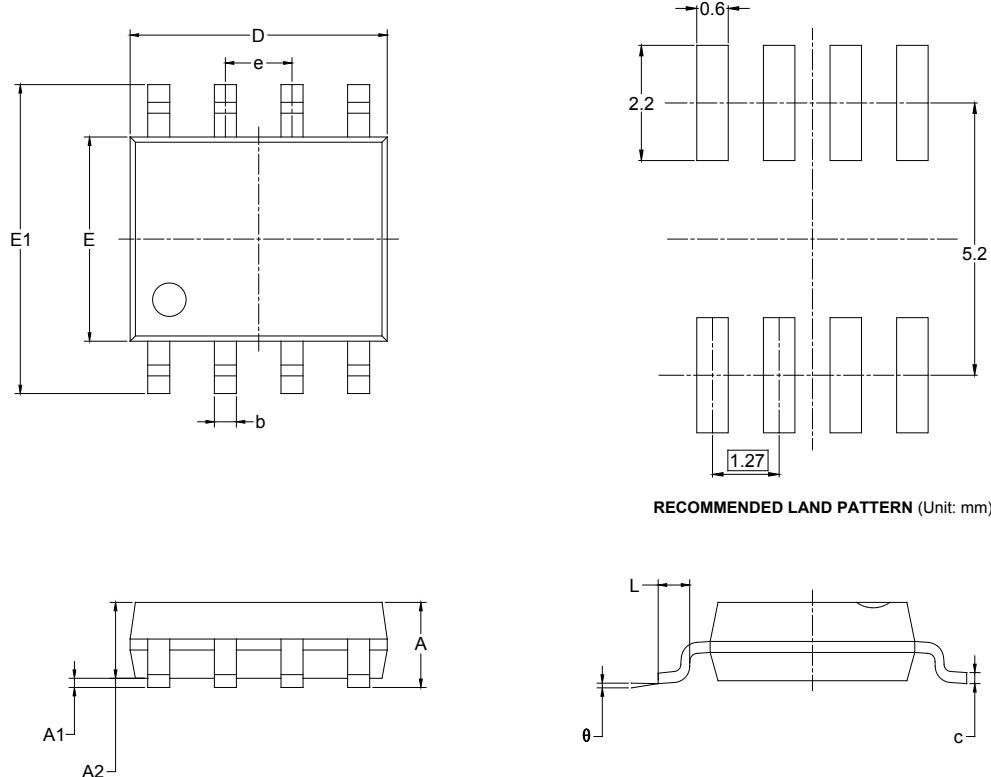SOIC-8




Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

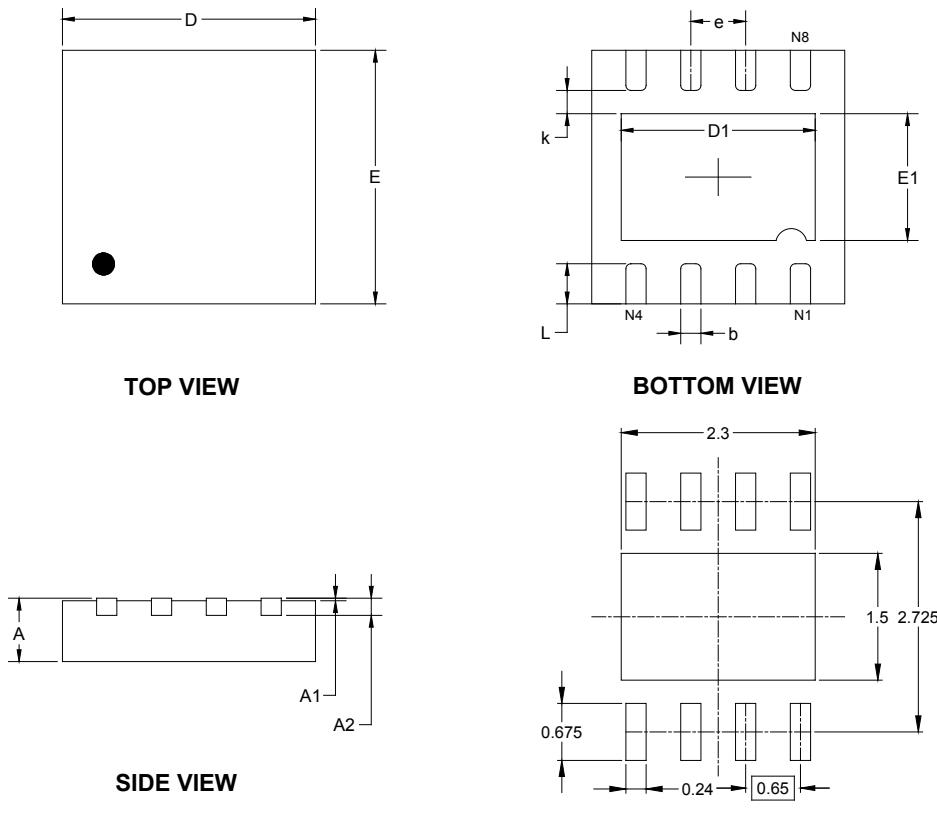TDFN-3x3-8L




Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203 REF		0.008 REF	
D	2.900	3.100	0.114	0.122
D1	2.200	2.400	0.087	0.094
E	2.900	3.100	0.114	0.122
E1	1.400	1.600	0.055	0.063
k	0.200 MIN		0.008 MIN	
b	0.180	0.300	0.007	0.012
e	0.650 TYP		0.026 TYP	
L	0.375	0.575	0.015	0.023


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

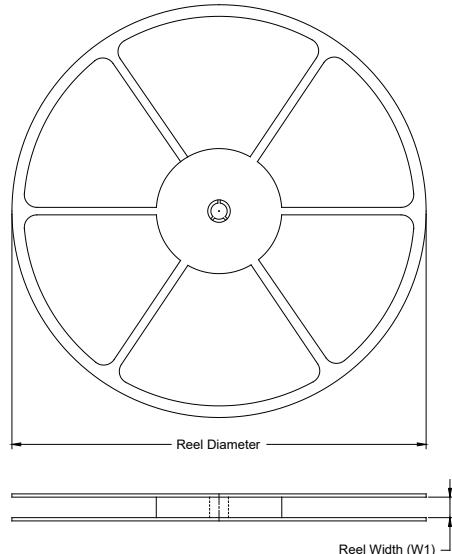REEL DIMENSIONS



TAPE DIMENSIONS

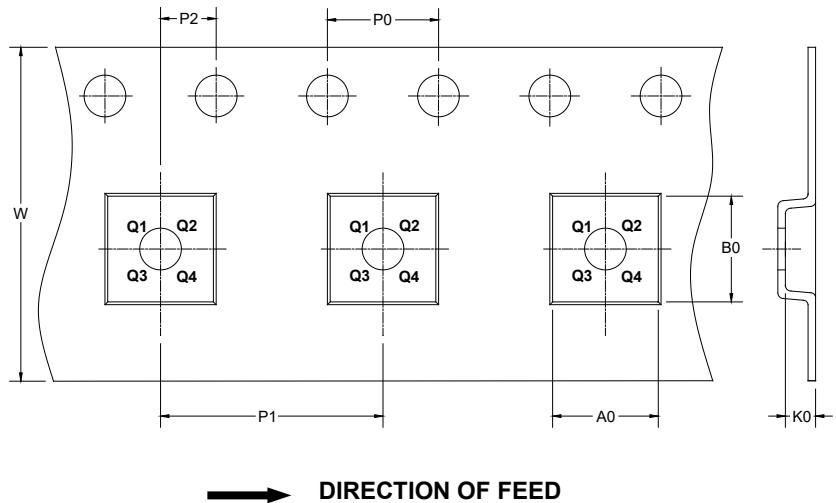


NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
TDFN-3x3-8L	13"	12.4	3.35	3.35	1.13	4.0	8.0	2.0	12.0	Q1

PACKAGE INFORMATION

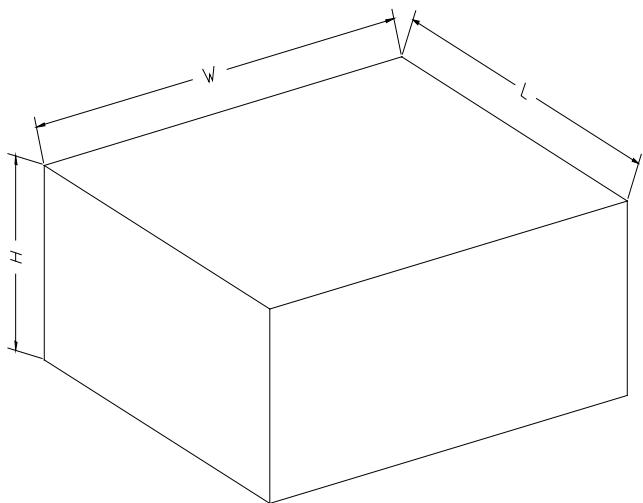CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

00002